All Pages Of This Edition Approved			
Signature:		Date:	

REV.	DESCRIPTION	REVISER	DATE
V0	NEW	GONG	2023.3.9
V1	ADD AF	RONG	2023.5.19

ROHS

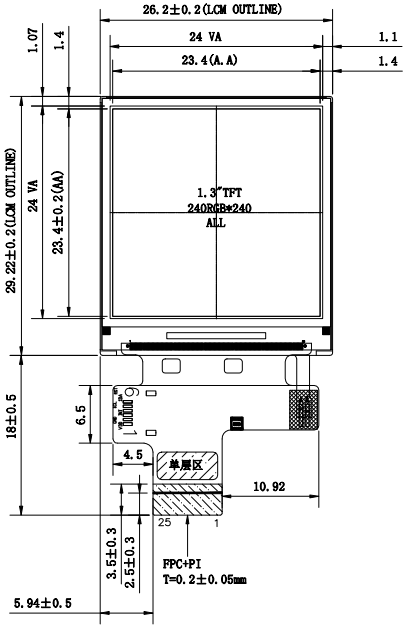

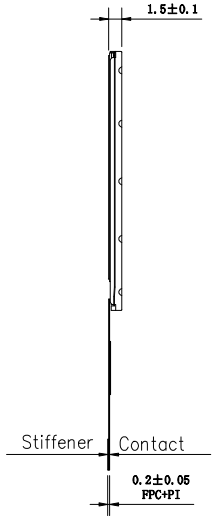

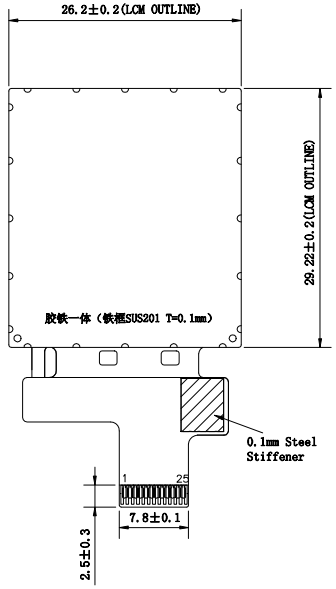



CN:FH34S-6S-0.5SH(T=1.0mm)
Scale 2:1

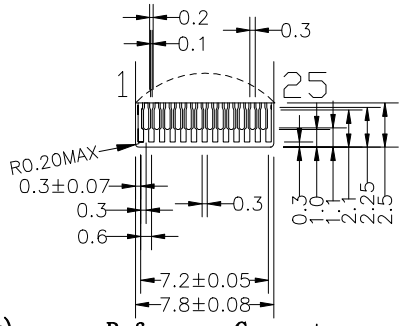

Reference Connector:
FH26W-25S-0.3SHW
Scale 2:1

Pin Assignment	
1	GND
2	VCI
3	SDO
4	SDA
5	RS
6	SCL
7	TE
8	CS
9	RESET
10	GND
11	LEDA
12	LEDK
13	LEDK
14	LEDK
15	LEDK
16	GND
17	GND
18	TP_VCI
19	GND
20	TP_INT
21	TP_SCL
22	TP_SDA
23	TP_RESET
24	GND
25	GND

TP-PIN DESCRIPTION

No.	PIN NAME(TPM)
1	TP_VCI3.3V
2	GND
3	TP_INT1.8V
4	TP_SCL1.8V
5	TP_SDA1.8V
6	TP_RESET1.8V

TFT NOTES:
1. Display Type:IPS Transmissive TFT;
2. Backlight:2-chips LED, series;
3. View Direction:ALL;
4. Driver IC:ST7789V
5. General Tolerance:±0.2;
6. Operating Temperature : -20° - +70° C
7. Storage Temperature : -30° - +80° C
8. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS

LED CIRCUIT DIAGRAM:



IF=40mA , VF=3.1V(TYP)
300nits(MIN) 350nits(Typ);

Kingtech Group Co.,Ltd

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODEL NUMBER :		SHEET:	1 Of 1
DESIGN BY:			20230308	PV01310Y0125K			
CHECKED BY:						DRAWING DESCRITUON:	LCM+CTP
APPROVED BY:					PROJECTION		