

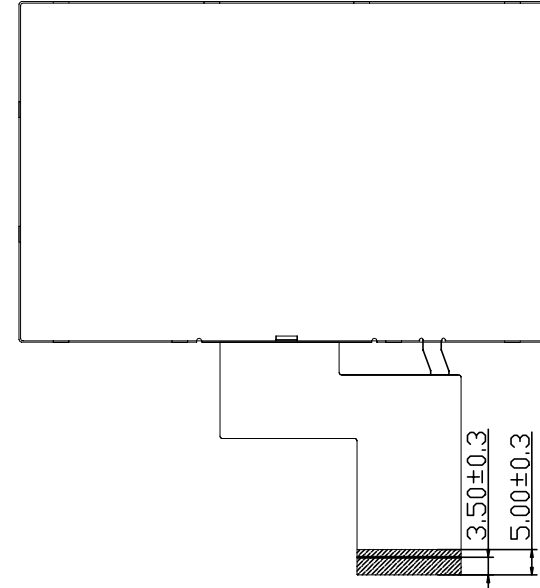


8	7	6	5	4	3	2	1
已确认此版本的所有图纸					REV	DESCRIPTION	DATE
客户签名:	日期:				1.0	首次设计	2023-04-26

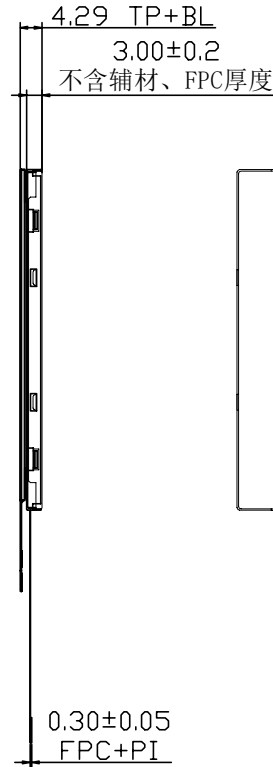

此款不喷码

PIN	SYMBLE
1	LEDK
2	LEDA
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	NC
38	NC
39	NC
40	NC

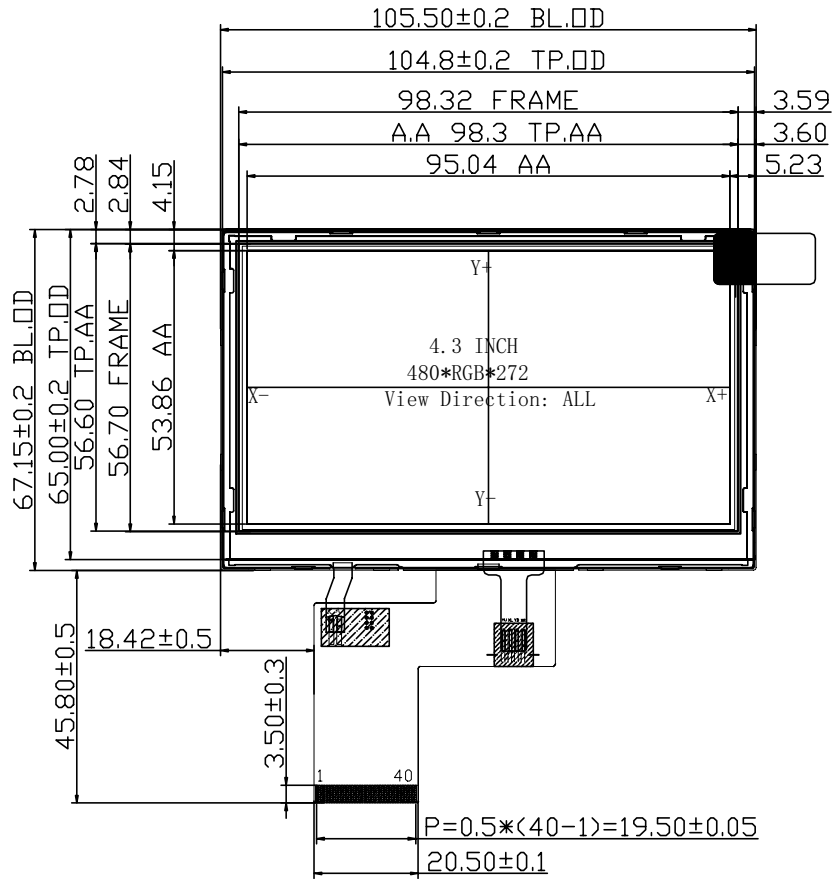

- Notes:
1. Display Mode: 16.7M TFT/Normally Black
  2. Viewing Angle: ALL
  3. LCD Driver IC: ST7282A-G6-E8A
  4. Operating Temp: -20° C ~ +70° C
  5. Storage Temp: -30° C ~ +80° C
  6. \*:Critical Dimension, ( ):Reference Dimension
  7. Undefinition Tolerance: ±0.2
  8. Surface Luminance: 400 CD/M (TYP)
  9. Requirements on Environmental Protection: ROHS

Kingtech Group Co., Ltd.	TITLE:	ASSEMBLY	DO NOT SCALE THIS DRAWING, GENERAL TOLERANCE: ±0.2			
	PART NO.:	PV043032H0140C-R				
	DRAWN BY:		DATE:		PROJECTION:	
	CHECKED BY:		DATE:		SCALE: N.T.S	
	APPROVED BY:		DATE:		SHEET: 1 OF 1	